


**WALL CLADDING PROFILES
32/1000 Reverse · Steel**

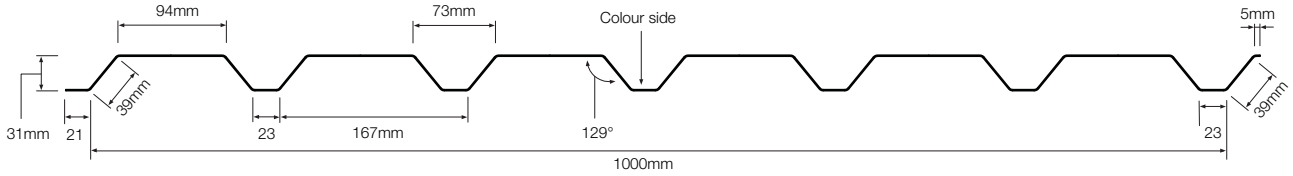

Dimension details

Cover width	1,000mm
Profile pitch	167mm
Profile depth	32mm
Crown width	23mm
Valley width	94mm
Rib width	73mm
Web	40mm
Overlap (left as shown above)	21mm
Underlap (right as shown above right)	5mm (minimum)

Weight per linear metre

0.5mm	4.823 kgs
0.7mm	6.753 kgs
0.9mm	8.682 kgs

Tolerance on all dimensions as per BS EN 508 – 2.

32/1000 Reverse Steel · Load/Span tables – working load UDL (kN/m²)

Load factor (working load to ultimate) = 1.5

		SPAN (m)																		
		L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
POSITIVE PRESSURE	Single Span	0.5mm	3.84	3.17	2.67	2.27	1.96	1.71	1.50	1.33	1.17	1.00	0.85	0.74	0.64	0.56	0.49	0.44	0.39	
	Double Span	0.5mm	2.24	1.96	1.72	1.53	1.37	1.23	1.12	1.02	0.93	0.86	0.79	0.73	0.68	0.63	0.59	0.55	0.52	
	Multi Span	0.5mm	2.65	2.32	2.04	1.82	1.63	1.47	1.34	1.22	1.12	1.03	0.95	0.88	0.82	0.76	0.71	0.66	0.62	
	Single Span	0.7mm	5.76	4.76	4.00	3.41	2.94	2.56	2.25	1.99	1.78	1.52	1.31	1.13	0.98	0.86	0.76	0.67	0.59	
	Double Span	0.7mm	3.95	3.42	3.00	2.65	2.36	2.12	1.91	1.73	1.58	1.44	1.33	1.22	1.13	1.05	0.98	0.91	0.85	
	Multi Span	0.7mm	4.70	4.08	3.58	3.17	2.83	2.54	2.30	2.09	1.90	1.74	1.60	1.48	1.37	1.27	1.19	1.11	0.99	
	Span	0.9mm	7.74	6.40	5.38	4.58	3.95	3.44	3.03	2.68	2.39	2.08	1.79	1.54	1.34	1.18	1.03	0.92	0.81	
	Double Span	0.9mm	5.77	4.98	4.34	3.81	3.38	3.02	2.72	2.46	2.23	2.04	1.87	1.72	1.58	1.47	1.36	1.27	1.18	
	Multi Span	0.9mm	6.90	5.96	5.21	4.59	4.08	3.65	3.28	2.97	2.70	2.47	2.27	2.09	1.93	1.79	1.66	1.53	1.36	

Load factor (working load to ultimate) = 1.5

		SPAN (m)																		
		L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
SUCTION	Single Span	0.5mm	3.86	3.51	2.97	2.53	2.18	1.90	1.67	1.48	1.32	1.18	1.07	0.95	0.82	0.72	0.63	0.56	0.50	
	Double Span	0.5mm	2.14	1.86	1.64	1.45	1.30	1.17	1.06	0.96	0.88	0.80	0.74	0.68	0.63	0.59	0.55	0.51	0.48	
	Multi Span	0.5mm	2.53	2.21	1.95	1.73	1.55	1.39	1.26	1.15	1.05	0.97	0.89	0.82	0.76	0.71	0.66	0.62	0.58	
	Single Span	0.7mm	6.49	5.36	4.50	3.84	3.31	2.88	2.53	2.24	2.00	1.80	1.62	1.40	1.21	1.06	0.93	0.83	0.74	
	Double Span	0.7mm	3.72	3.22	2.81	2.48	2.20	1.97	1.78	1.61	1.46	1.34	1.23	1.13	1.04	0.97	0.90	0.84	0.78	
	Multi Span	0.7mm	3.72	3.22	2.81	2.48	2.20	1.97	1.78	1.61	1.46	1.34	1.23	1.13	1.04	0.97	0.90	0.84	0.78	
	Single Span	0.9mm	8.45	6.99	5.87	5.00	4.31	3.76	3.30	2.93	2.61	2.34	2.10	1.82	1.58	1.38	1.22	1.08	0.96	
	Double Span	0.9mm	5.50	4.73	4.11	3.61	3.20	2.85	2.56	2.31	2.10	1.91	1.75	1.61	1.49	1.37	1.28	1.19	1.11	
	Multi Span	0.9mm	6.59	5.68	4.95	4.36	3.86	3.45	3.10	2.81	2.55	2.33	2.13	1.96	1.81	1.68	1.56	1.45	1.35	

Tables calculated by the SCI to EN 1993-1-3 (Eurocode EC3).