


**WALL CLADDING PROFILES
38/914 Reverse · Aluminium**

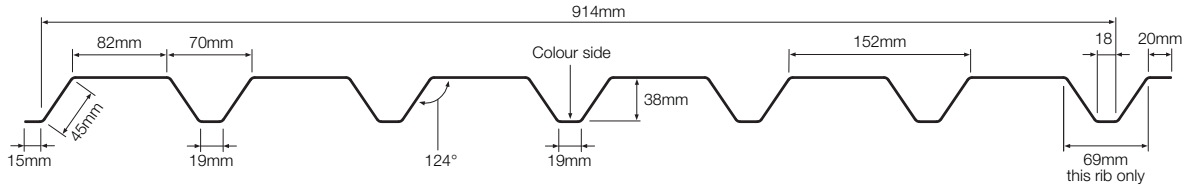

Dimension details

Cover width	914mm
Profile pitch	152mm
Profile depth	38mm
Crown width	82mm
Valley width	19mm
Rib width	70mm
Web	46mm
Overlap (left as shown above)	20mm (minimum)
Underlap (right as shown above right)	15mm

Weight per linear metre

0.9mm 3.039 kgs

Tolerance on all dimensions as per BS EN 508 – 2.

38/914 Reverse Aluminium · Load/Span tables – working load UDL (kN/m²)

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
POSITIVE PRESSURE	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	4.84	4.00	3.36	2.81	2.25	1.83	1.51	1.26	1.06	0.90	0.77	0.67	0.58	0.51	0.45	0.39	0.35
	Double Span	0.9mm	3.60	3.15	2.77	2.46	2.19	1.97	1.77	1.60	1.46	1.33	1.22	1.11	0.97	0.84	0.74	0.66	0.58
	Multi Span	0.9mm	4.24	3.72	3.29	2.93	2.62	2.36	2.13	1.94	1.76	1.50	1.28	1.11	0.97	0.84	0.74	0.66	0.58

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
SUCTION	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	5.56	4.60	3.86	3.29	2.80	2.28	1.87	1.56	1.32	1.12	0.96	0.83	0.72	0.63	0.56	0.49	0.44
	Double Span	0.9mm	3.39	2.95	2.58	2.27	2.02	1.80	1.62	1.46	1.32	1.20	1.10	1.01	0.93	0.85	0.79	0.73	0.68
	Multi Span	0.9mm	4.02	3.51	3.08	2.73	2.43	2.18	1.96	1.77	1.61	1.47	1.34	1.23	1.14	1.05	0.93	0.82	0.73

Tables calculated by the SCI to EN 1993-1-3 (Eurocode EC9).