

Dimension details

Cover width	1,000mm
Profile pitch	167mm
Profile depth	32mm
Crown width	23mm
Valley width	94mm
Rib width	73mm
Web	39mm
Overlap (left as shown above)	8mm
Underlap (right as shown above right)	5mm

Weight per linear metre

0.9mm	3.039 kgs
-------	-----------

Tolerance on all dimensions as per BS EN 508 – 2.

32/1000 Forward Aluminium · Load/Span tables – working load UDL (kN/m²)

Load factor (working load to ultimate) = 1.5


		SPAN (m)																	
GRAVITY	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	3.92	2.95	2.27	1.79	1.43	1.16	0.96	0.80	0.67	0.57	0.49	0.42	0.37	0.32	0.28	0.25	0.22
	Double Span	0.9mm	2.88	2.49	2.16	1.90	1.68	1.49	1.34	1.20	1.09	0.95	0.82	0.71	0.61	0.54	0.47	0.42	0.37
	Multi Span	0.9mm	3.43	2.98	2.60	2.29	2.03	1.81	1.60	1.33	1.12	0.95	0.82	0.71	0.61	0.54	0.47	0.42	0.37

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
UPLIFT	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	3.11	2.34	1.80	1.42	1.13	0.92	0.76	0.63	0.53	0.45	0.39	0.34	0.29	0.26	0.23	0.20	0.18
	Double Span	0.9mm	3.04	2.64	2.31	2.04	1.81	1.54	1.27	1.06	0.89	0.76	0.65	0.56	0.49	0.43	0.38	0.33	0.30
	Multi Span	0.9mm	3.60	3.14	2.76	2.36	1.89	1.54	1.27	1.06	0.89	0.76	0.65	0.56	0.49	0.43	0.38	0.33	0.30

Tables calculated by the SCI to EN 1993-1-3 (Eurocode EC9).

**ROOF CLADDING PROFILES
32/1000 Forward · Steel**

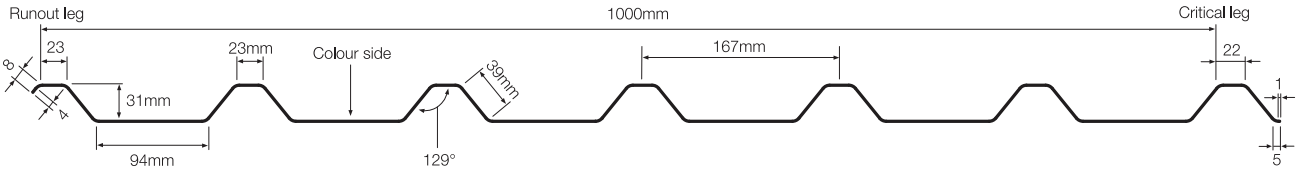

Dimension details

Cover width	1,000mm
Profile pitch	167mm
Profile depth	32mm
Crown width	23mm
Valley width	94mm
Rib width	73mm
Web	39mm
Overlap (left as shown above)	8mm
Underlap (right as shown above right)	5mm

Weight per linear metre

0.5mm	4.823 kgs
0.7mm	6.753 kgs
0.9mm	8.682 kgs

Tolerance on all dimensions as per BS EN 508 – 2.

32/1000 Forward Steel · Load/Span tables – working load UDL (kN/m²)

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
GRAVITY	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.5mm	3.86	3.51	2.97	2.53	2.18	1.90	1.60	1.34	1.13	0.96	0.82	0.71	0.62	0.54	0.47	0.42	0.37
	Double Span	0.5mm	2.14	1.86	1.64	1.45	1.30	1.17	1.06	0.96	0.88	0.80	0.74	0.68	0.63	0.59	0.55	0.51	0.48
	Multi Span	0.5mm	2.53	2.21	1.95	1.73	1.55	1.39	1.26	1.15	1.05	0.97	0.89	0.82	0.76	0.71	0.66	0.62	0.58
	Single Span	0.7mm	6.49	5.36	4.50	3.84	3.31	2.87	2.37	1.97	1.66	1.41	1.21	1.05	0.91	0.80	0.70	0.62	0.55
	Double Span	0.7mm	3.72	3.22	2.81	2.48	2.20	1.97	1.78	1.61	1.46	1.34	1.23	1.13	1.04	0.97	0.90	0.84	0.78
	Multi Span	0.7mm	4.44	3.84	3.37	2.97	2.65	2.37	2.14	1.94	1.77	1.62	1.49	1.37	1.27	1.18	1.09	1.02	0.92
	Single Span	0.9mm	8.45	6.99	5.87	5.00	4.31	3.74	3.08	2.57	2.17	1.84	1.58	1.36	1.19	1.04	0.91	0.81	0.72
	Double Span	0.9mm	5.50	4.73	4.11	3.61	3.20	2.85	2.56	2.31	2.10	1.91	1.75	1.61	1.49	1.37	1.28	1.19	1.11
	Multi Span	0.9mm	6.59	5.68	4.95	4.36	3.86	3.45	3.10	2.81	2.55	2.33	2.13	1.96	1.81	1.68	1.52	1.35	1.20

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
UPLIFT	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.5mm	3.84	3.17	2.67	2.27	1.87	1.52	1.25	1.04	0.88	0.75	0.64	0.55	0.48	0.42	0.37	0.33	0.29
	Double Span	0.5mm	2.24	1.96	1.72	1.53	1.37	1.23	1.12	1.02	0.93	0.86	0.79	0.73	0.68	0.63	0.59	0.55	0.49
	Multi Span	0.5mm	2.65	2.32	2.04	1.82	1.63	1.47	1.34	1.22	1.12	1.03	0.95	0.88	0.80	0.70	0.62	0.55	0.49
	Single Span	0.7mm	5.76	4.76	4.00	3.41	2.86	2.32	1.91	1.59	1.34	1.14	0.98	0.85	0.74	0.64	0.57	0.50	0.45
	Double Span	0.7mm	3.95	3.42	3.00	2.65	2.36	2.12	1.91	1.73	1.58	1.44	1.33	1.22	1.13	1.05	0.94	0.84	0.74
	Multi Span	0.7mm	4.70	4.08	3.58	3.17	2.83	2.54	2.30	2.09	1.90	1.74	1.60	1.41	1.23	1.07	0.94	0.84	0.74
	Single Span	0.9mm	7.74	6.40	5.38	4.58	3.91	3.18	2.62	2.18	1.84	1.56	1.34	1.16	1.01	0.88	0.78	0.69	0.61
	Double Span	0.9mm	5.77	4.98	4.34	3.81	3.38	3.02	2.72	2.46	2.23	2.04	1.87	1.72	1.58	1.47	1.29	1.14	1.02
	Multi Span	0.9mm	6.90	5.96	5.21	4.59	4.08	3.65	3.28	2.97	2.70	2.47	2.23	1.93	1.68	1.47	1.29	1.14	1.02

Tables calculated by the SCI to EN 1993-1-3 (Eurocode EC3).